

Planet Audio

BLUETOOTH® (Audio Streaming Marine Gauge Digital Media AM/FM Receiver FEATURING ZERO STANDBY CURRENT DRAIN

USER MANUAL QUICK INSTALLATION GUIDE

PGR45B

BLUETOOTH® MARINE GAUGE DIGITAL MEDIA

iPod® and iPhone® are registered trademarks of Apple Inc. registered in the USA and other countries.
Planet Audio Systems is not affiliated with Apple Inc.



3451 Lunar Court • Oxnard, CA 93030

888-990-1236 US Toll-free 805-751-4854 Customer Service tech support: www.planetau

0517 VER:1.0 EN




Thank you for purchasing this



PGR45B Bluetooth Marine Gauge Digital Media AM/FM Receiver

Please read through these instructions carefully so you will know how to operate your model properly. After you have finished reading the instructions, keep this document in a safe place for future reference.

THIS PACKAGE CONTAINS



INFORMATION TO THE USER

Bluetooth

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks is under license. Other trademarks and trade names are those of their respective owners.

FCC COMPLIANCE STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of this device.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter. The Bluetooth antenna cannot be removed (or replaced) by user. This equipment complies with FCC/ IC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines and RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20 cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles). Alteration or modifications carried out without appropriate authorization may invalidate the user's right to operate the

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Relocate or reorient the receiving antenna.
 Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from
- that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help.

!! WARNING !!

ADJUSTMENT OR ALTERATIONS OF THIS DEVICE MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

hazardous situations.

IMPORTANT SAFETY PRECAUTIONS

BE SURE TO OBSERVE THE FOLLOWING GUIDELINES:

• Do not turn up the volume so high that you can't hear what's around you.

- · Use caution or temporarily discontinue use in potentially
- · Do not operate mobile video equipment while driving a motorized vehicle - safe driving and safety consideration of others should always be your highest priority.
- · Set your volume control at a low setting, then slowly increase the sound until you can hear it comfortably without distortion, or ear
- In the event you should notice smoke, strange noises or odor from this product, or any other abnormal signs, immediately turn off the power and consult your dealer or the nearest authorized Planet Audio Service Center Using this product in this condition may result in permanent damage to the system.

Make the mounting hole size as follows

Slip the unit through the hole cutout and into U-bracket

6 Secure and waterproof the wiring

SUGGESTED MOUNTING METHODS

Install studs mounts into rear of chassis

Snap off break-away tabs to best fit

vour applications depth

TOOLS NEEDED: Measuring Tape / Ruler

- Wrench and/or Pliers

- Hole Saw

- Crimp Tool

BEFORE YOU START

INSTALLATION PRECAUTIONS

Always consult with a professional installer

· Do not attempt to install or service this product by yourself. Installation or servicing of this product by persons without professional training and experience in electronic equipment and motorized vehicle accessories may be dangerous and could expose you to the risk of electric shock, injury or other hazards

- Refer any repairs to a qualified PLANET AUDIO Service Center • The PGR45B should be wired directly to a vehicles battery
- When wiring directly to the vehicles battery, be sure to disconnect the batteries negative terminal wire before starting any wiring procedures, if extending the main power primary wire, it is suggested that an optional fuse and fuse holder (not included) with minimum rating of 20 Amperes be in-line with the positive battery terminal
- The ground cable length should be as short as possible, if extending from you battery, be sure to use a proper gauge rating for the length of the run, use only high quality copper primary type wire
- The PGR45B has a IPX6 weather resistant design, it should not be submerged in or under water under any circumstances
- Do not use abrasive cleaning materials on the lens or bezel
- Use only the installation parts provided with the PGR45B

CAUTION!!

Using other mounting methods may void

this warranty

(3) Adjust M4 nuts for the best mounting depth

5 Firmly tighten remaining M4 nuts

To avoid potential shorts in the electrical system, be sure to disconnect the (-) battery cable before installation. Use this unit with a 12-Volt battery and negative grounding only. Failure to do so may result in a fire or malfunction



WIRE DIAGRAM

When replacing the fuse, be sure to only use a fuse of the rating specified on this product. To avoid short-circuiting, cover any disconnected leads with insulating tape. It is specially impor-

tant to insulate any unused wires, which if left uncovered may cause a short circuit. When connecting other devices to this product, refer to the manual for the product to be connected. The black cable is ground. make sure to connect the ground wire first.

Ensure that the ground cable is properly connected to metal parts of the vehicles body frame or direct to the battery if your vehicle does not have a grounded chassis frame. The ground cable of this units power amp and a second powered system must be connected to the frame separately with different screws. If the screw for the ground wire loosens or falls out, it could result in fire or malfunction.

TECHNICAL SUPPORT

TROUBLESHOOTING GUIDE

SOLUTION

Check / replace the fuce

Replace faulty speaker

volume status

Bluetooth function

Turn ignition to on position

Press the volume level up

Check your devices playing /

device for how to enable the

Follow how to reconnect a

Move the device closer to the

audio system or remove any

Disconnect power for

to recharge the hattery

Follow steps in section B

10 seconds to reset

obstacle between the device

Charge battery, run the engine

Refer to the user manual of the

CAUSE

The fires is blown

Blown speaker

Ignition not engaged

Volume is low / muted

device is not enabled

I ow hattery nower

Reset the main system


Device is paused or muted

The PGP45B BT memory is full device in section E

The Bluetooth reception is poor and the systems antenna

1-805-751-4854

www.planetaudiousa.com/customer-support



SPECIFICATIONS

INTEGRATED AMPLIFIER

(All channels driven)

· Channels: 4

MAX Continuous Output: 240W

PEAK Power Rating: 60W / channel

Button Backlight Illumination: BLUE LED

F/R/S RCA Preamp Output: 2VRMS

Grounding System: Negative type

Maximum Current Consumption: 15A

· 3-way protection circuitry (thermal,

overload, and speaker short protecti

(Replace with AGU Fuse Type Only)

Unit Weight: 1.08lbs / 0.52kg

-4°E to 158°E / -20°C to 70°C

Replacement Fuse: 15A

RCA Input Impedance: 10kΩ

LCD: TN Type / Active Matrix

Power Source: 14.4VDC

(10.8V ~ 16V allowable)

 Storage Temperature -22°F to 176°F / -30°C to 80°C

FM TUNER FREQUENCY RANGE USA 87.5~107.9MHz

TROUBLE

Unit will not turn or

No sound is heard

The audio quality is poo

Unit has become

Stuetooth enabled device

- Europe 87.5~108MHz
- Asia 87.5~108MHz Australia 87.5~108MH
- Usable Sensitivity: 12dB (S/N=30dB)
- - Frequency Response: 20-20kHz 4Ω stable

M TUNER FREQUENCY RANGE

- USA 530~1710KHz Europe 522~1620KHz
- Asia 522~1620KHz
- Australia 522~1620KHz
- Usable Sensitivity: 40dB (S/N=20dB

WEATHER BAND SELECTION

CH.1 162.400MHz CH.2 162.425MHz

- CH 3 162 450MHz
- CH.4 162.475MHz
- CH.5 162.500MHz CH.6 162.525MHz
- CH.7 162.550MHz

Bands: 1

BLUETOOTH BT: 3.0

- BT Range: 33Ft / 10M (Class 2)
 BT Profiles: A2DP / AVRCP 1.3


USB DRIVE MEDIA SUPPORTED

- 65,000 Songs
- . 32GB / FAT 32
- USB 2.0 High Speed
 USB Output Voltage: 5VDC @ 1A

Specifications subject to change without notice

QUICK START GUIDE

CAUTION!!

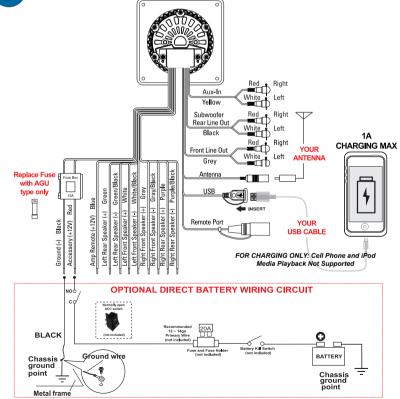



Do not ground or short the speaker leads



xBass On/Off

AUDIO

Short Press

OPERATION QUICK START GUIDE \\\\\\\\\\\\\\\

DISP



GETTING STARTED
















B





Returns to previous item

Short press to mute restore volume

▶/II ◆ Press to pause, press again to resume playback

and hold for Fast/Forward/Rewind

SRC Press to scroll and select available Source

PRESET Press to scroll and select Presets 1 ~ 6

Turn the unit on, press and hold again to turn the unit off

◆ Tuner/Weather Band Mode: Press to enter into Manual

Media Playback Mode: Press to Track Up/Down, press

Press and hold to enter into Tuner Function modes: A-STORE / M-STORE / LOCAL / AREA / RDS / AF / TA / PTY

◆ Tuner/Weather Band Mode: To change different band, press and hold to access Auto Store mode, the strongest stations of the selected band

will be saved in preset channel automatically (FM1, FM2, AM1, WB1)

Press to access into the Audio Menu mode for adjustment

FADER / READOUT / SUBW / SUBW LPF / SUBW LEVEL

EU / XBASS / BASS / MIDDLE / TREBLE / BALANCE /

Press and hold to access into the System Menu:
 BT RECONNECT / BEEP ON/OFF / ABOUT / RESET

◆ Tuner Mode: Press to view RDS receiver information ENTER Media Playback: Press to view ID3 information

Media Playback Mode: Press to access into search Folder/File music mod


Press to decrease volume, press to increase volume


Seek mode, press and hold to enter into Auto Seek mode

TUNER SETUP










JAZZ M; COUNTRY; NATION M; OLDIES M; FOLK M;


CHILDREN; SOCIAL; RELIGION; PHONE IN; TRAVEL;

LEISURE; DOCUMENT

A-TEST: ALARM: NEWS: AFFAIRS: INFO: SPORT: FOLICATE

DRAMA: CULTURE: SCIENCE: VARIED: WEATHER: FINANCE

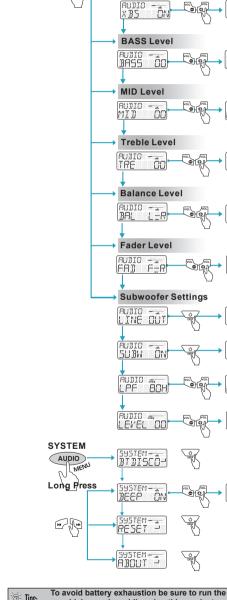



Turn On or Off beep sound

This feature allows Reconnect or Disconnect to the

paired mobile phone or Bluetooth device manually

RESET ← To restore the factory default settings vehicles engine while using this product. ABOUT | To view the device hardware and software versions Using this product without running the engine can drain the battery.

RADIO SUBWALL P6 10350


- 1) Press the SRC button to select RADIO
- 2) Press ►/II to MUTE, press again to UNMUTE
- 3) To advance stations press
 - 4) To skip previous stations press
 - 5) Press the button to display RADIO information 6) Press the PRESET button to recall PRESETS 1 ~ 6

屋

BLUETOOTH OPERATION

PAIRING & DISCOVERING A NEW BLUETOOTH CONNECTION

Note: The mobile device must be within 33ft (10m) of the PGR45B for Bluetooth to function properly.



NOTE: You have 2 minutes before you must restart this procedure over again.

2) Now that the PGR45B is in pairing mode:

- a. Go into the Settings Menu of your ANDROID device b. Enter the Bluetooth Menu and press SCAN
- c. "Planet Audio PGR45B" will now be display under AVAILABLE DEVICES
- d. If prompted, enter passcode: "0000'

iOS users:

- a. Go into the Settings Menu of your iOS device
- b. Enter the Bluetooth Menu
- c. "Planet Audio PGR45B" will now be displayed
- d. If prompted, enter passcode: "0000"
- 3) If the PGR45B is not seen, repeat the above steps to refresh the "Device List"

4) When the BT connection is successful you will see BT CONNECTED message on the PGR45B LCD display, you are now ready to stream music from your devices favorite media player to the PGR45B



RECONNECTION

- 1) Power on the PGR45B and your last paired device Bluetooth
- 2) The unit will now automatically be reconnected
- 3) If your device was previously paired with the PGR45B, but it wasn't the last paired device:
 - a. Ensure no other devices are currently paired
 - b. Press and hold MENU button to manually connect / reconnect to the PGR45B
- 4) If the device is out of range from the PGR45B, it will disconnect automatically:

5)The PGR45B will reconnect to the device once in range, a confirmation message will be displayed on the LCD



BLUETOOTH STREAMING MUSIC


1) Press the SRC button to select BT AUDIO



- 2) Press ▶/II to start PLAY, press again to PAUSE
- 3) To skip songs or advance tracks press \Longrightarrow , press and hold to FAST FORWARD
- 4) To select the previous track press the button | , press and hold to FAST REWIND
- 5) Press the button to display song ID3 information








- 2) Press ▶/ II to start PLAY, press again to PAUSE
- 3) To skip songs or advance tracks press , press and hold to FAST FORWARD
- 4) To select the previous track press # , press and hold to FAST REWIND

AUX-INPUT

5) Press the button to display song ID3 information







1) Press the SRC button to select AUX IN



Ensure to adjust the level of your devices master volume to 75%



BEEP←

AUDIO and SYSTEM SETUP







